

UT-020-13-TP


Semi-Rigid Coaxial Cables



Micro-Coax's specialized impedance semi-rigid cables—with impedances from 5 to 100Ω and diameters from 0.020 to 0.250 inches—are an ideal solution for any impedance matching requirement.

 Impedance 13 Ohms	 Operating Temperature -55°C to +100°C	 RoHS Compliant
---	---	--

Details and Materials

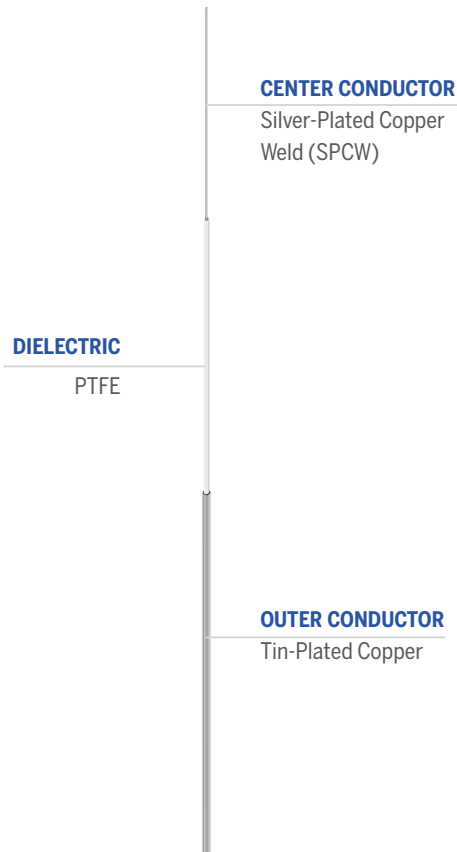

Dimensions

Outer Conductor Diameter	in	0.023
	mm	0.584
Center Conductor Diameter	in	0.0126
	mm	0.3200
Length (Maximum)	ft	10
	m	3.05

Mechanical Characteristics*

Outer Conductor Integrity Temp.	°C	125
Inside Bend Radius (Minimum)	in	0.050
	mm	1.270
Weight	lbs/100ft	0.13
	kg/100m	0.20

Electrical Characteristics*

Capacitance	pF/ft	111.6
	pF/m	366.0
Corona Extinction Voltage	VRMS @60 Hz	200
Voltage Withstanding	VRMS @60 Hz	250
Higher Order Mode Frequency	GHz	178.0

Power (@ 20 °C, Maximum)

GHz	Watts Cw
0.5	5.4
1.0	3.8
5.0	1.7
10.0	1.2
18.0	0.9
26.5	0.7
40.0	0.6
50.0	0.5
65.0	0.5
90.0	0.4

Attenuation (Typical)

GHz	dB/100 ft
0.5	112.2
1.0	158.9
5.0	357.5
10.0	508
18.0	685.4
26.5	835.5
40.0	1032.7
50.0	1159
65.0	1328.1
90.0	1574

* Applicable at room temperature. Contact for performance over temperature range.

MICRO-COAX 
AN AMPHENOL COMPANY